


**PARKING ACCESS AND REVENUE CONTROL SYSTEM
RFP#15-10-15**


QUESTIONS AND ANSWERS

June 18, 2015


1. Would there be a place to find the addresses of all parking locations?
A. <http://parkroanoke.com/wp-content/uploads/PARK-Roanoke-Map-20151.jpg>
2. Do you have plans for the Market Garage facility showing conduit?
A. **Please see attached plan.**
3. Will the hotel need access to operate the gate from the front desk remotely?
A. **Yes.**

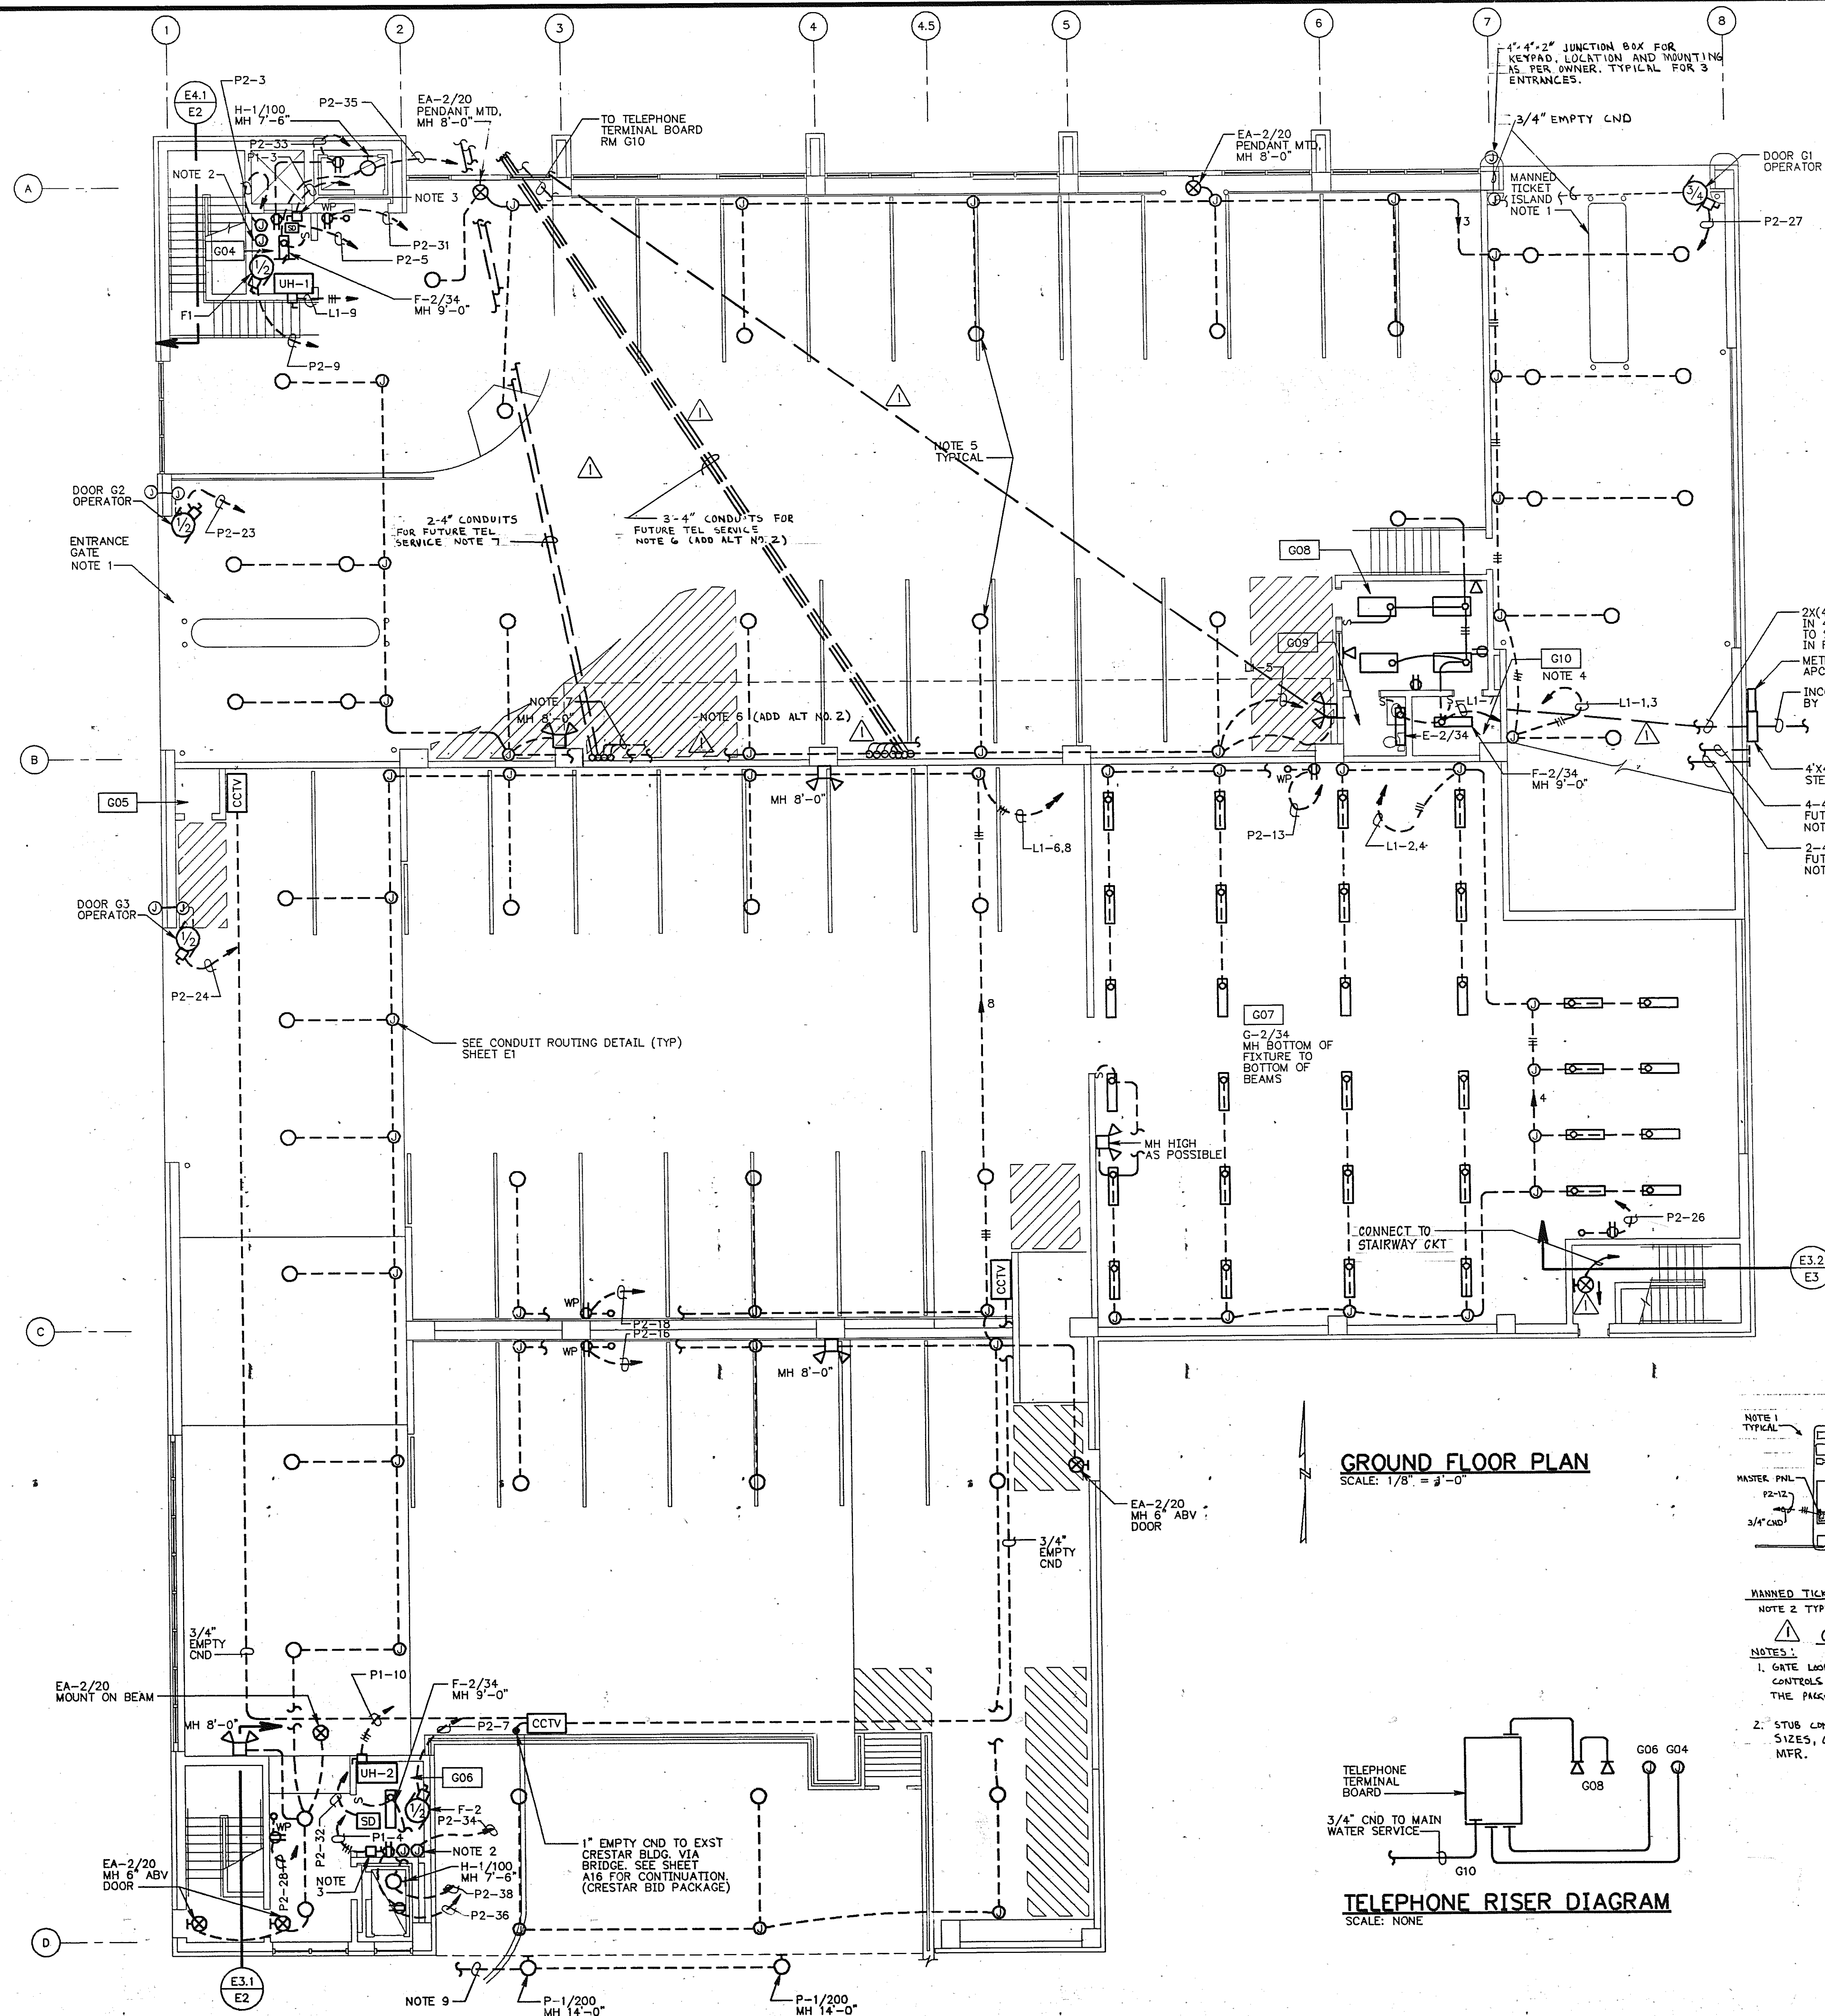


GROUND FLOOR PLAN
SCALE: 1/8" = 3'-0"

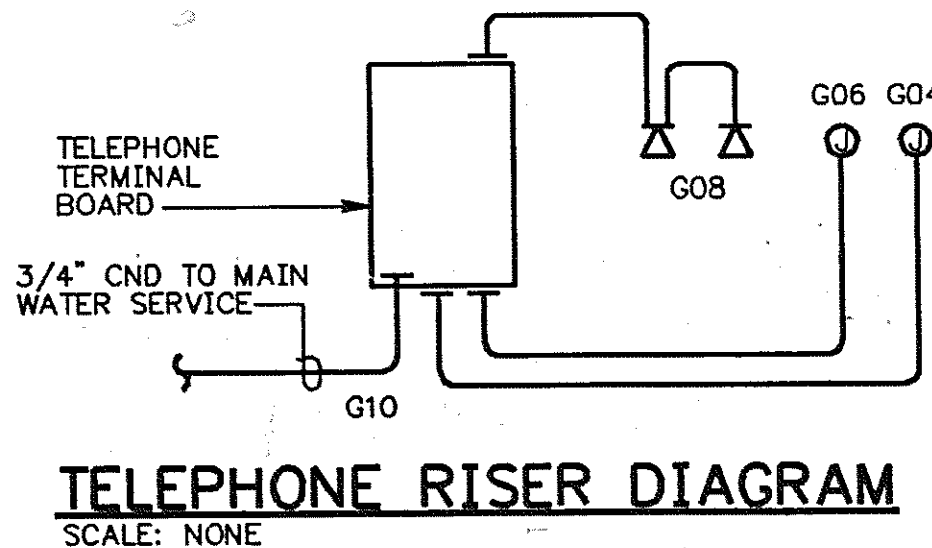

TELEPHONE RISER DIAGRAM
SCALE: NONE

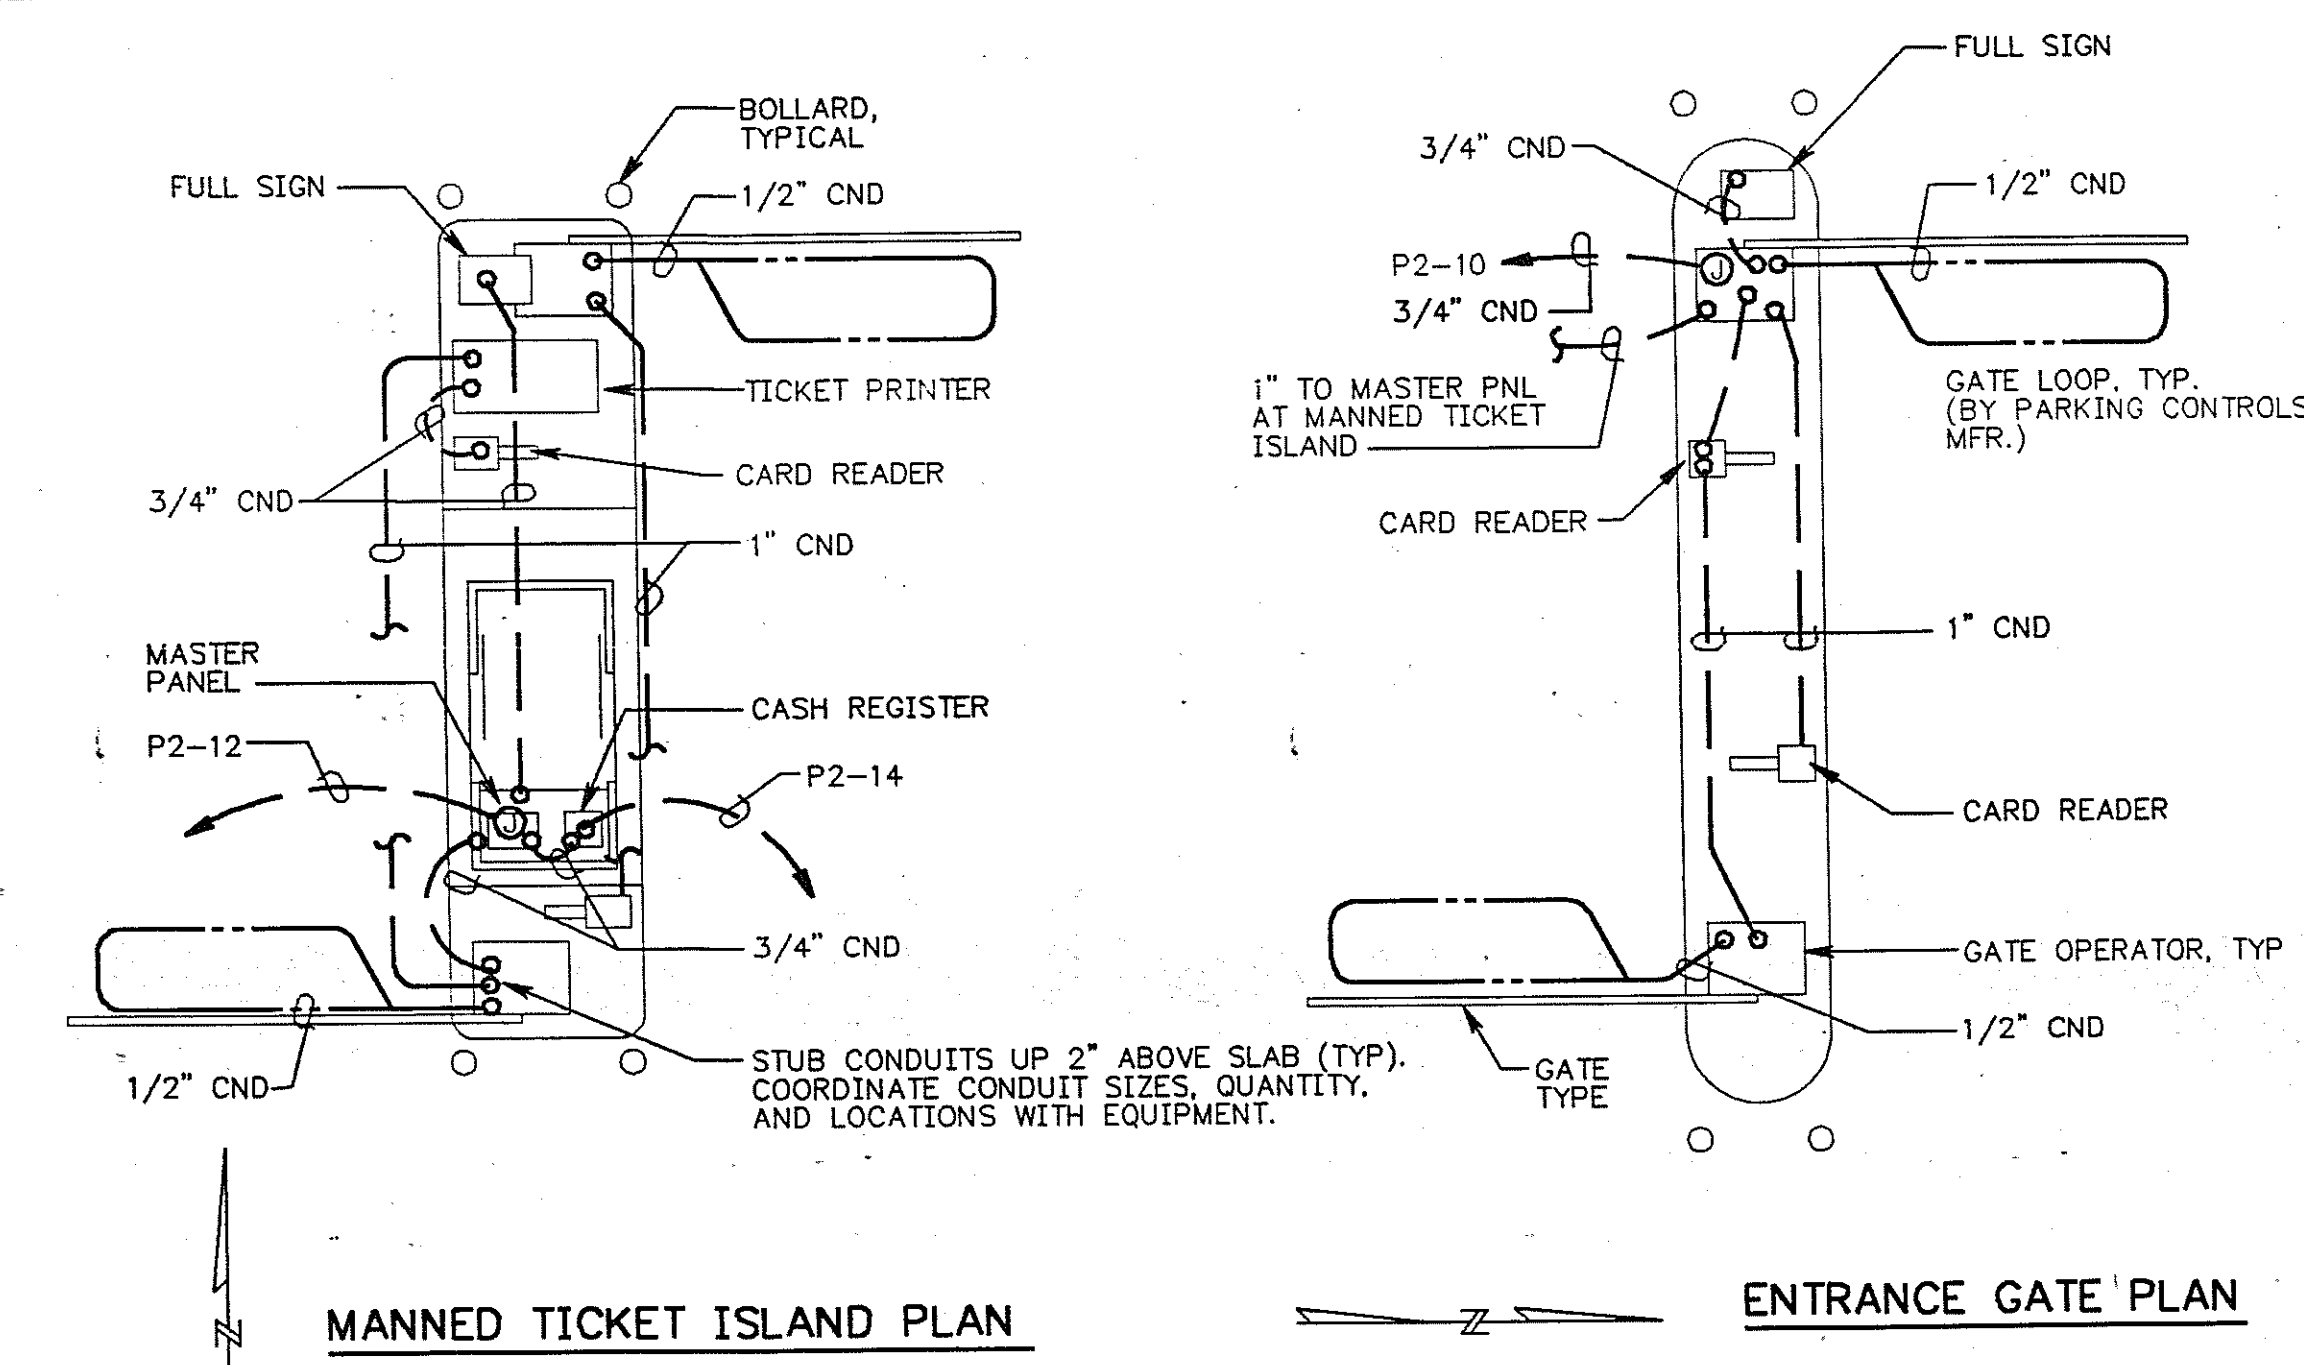

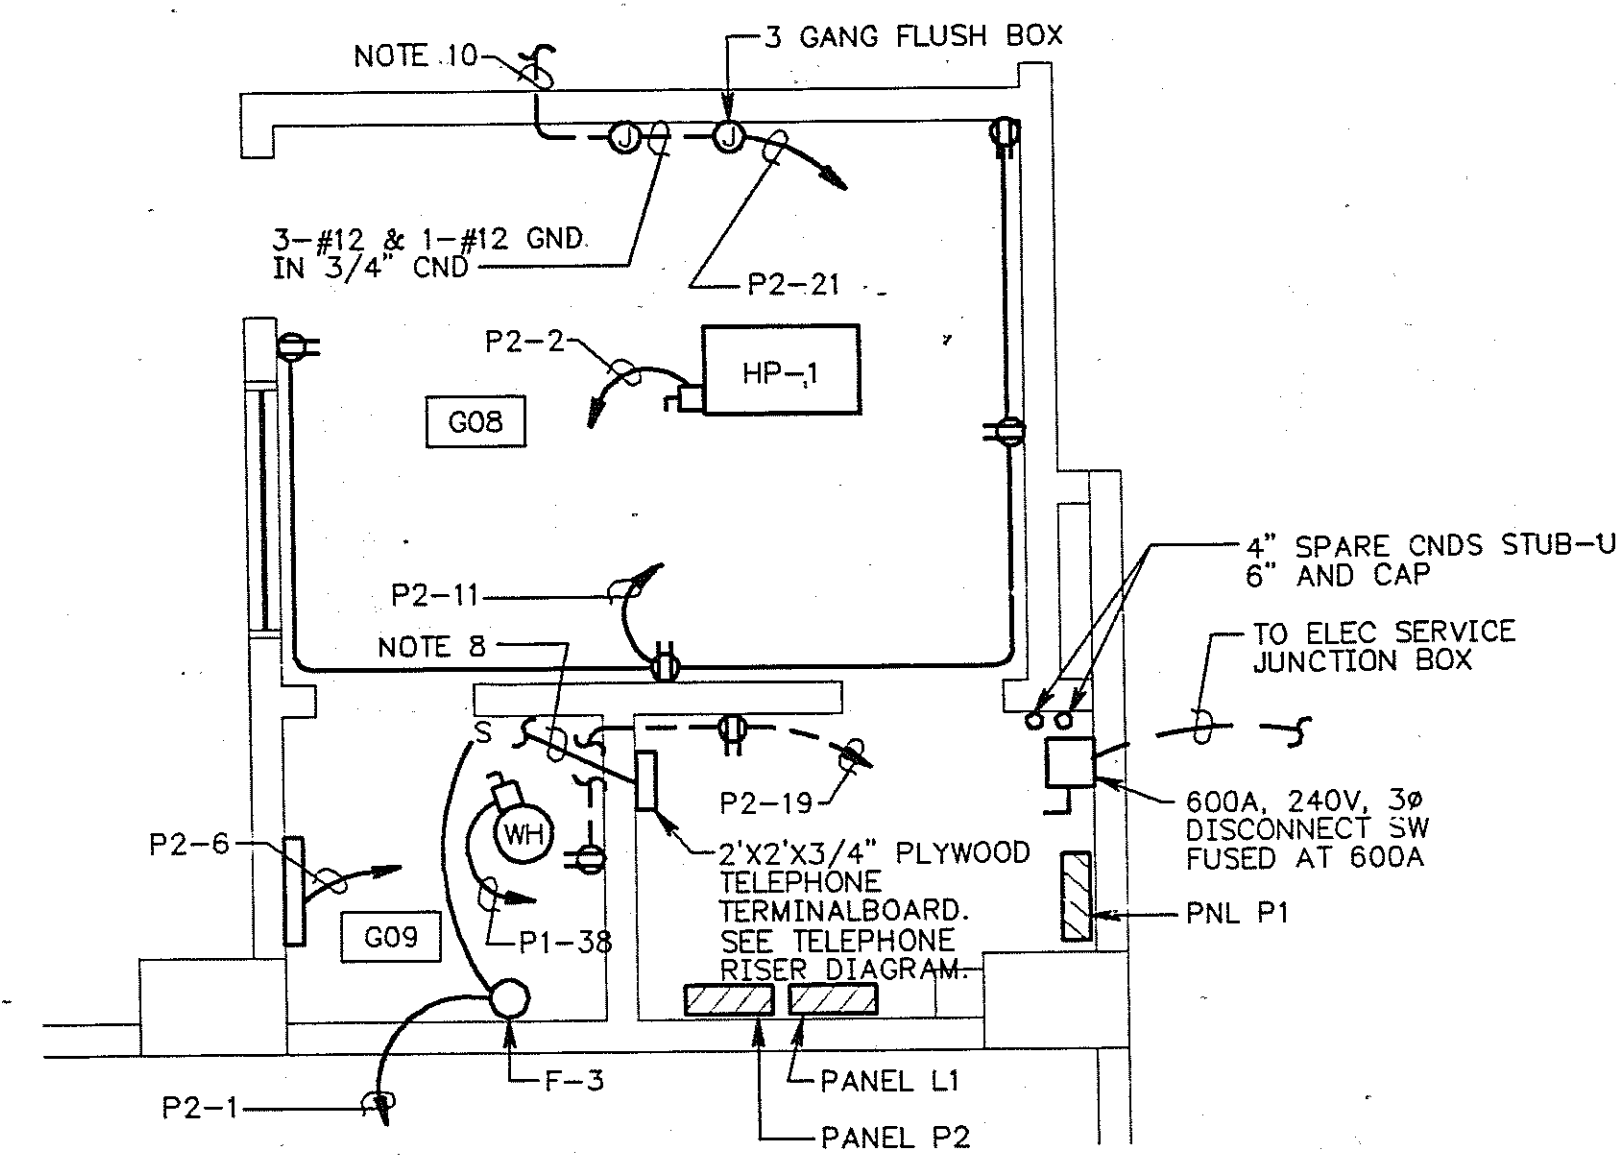

CONDUIT LAYOUT - PARKING CONTROLS
SCALE: 1/4" = 1'-0"



FLOOR PLAN - OFFICE AREA
SCALE: 1/4" = 1'-0"

- NOTES THIS SHEET:**
- SEE MANNED TICKET ISLAND PLAN AND ENTRANCE GATE PLAN THIS SHEET FOR CONDUIT LAYOUT OF PARKING CONTROLS.
 - JUNCTION BOXES, 4"x4"x2" WITH BLANK COVER, ONE FOR ELEV CAR LIGHT AND ONE FOR ELEV CAR TELEPHONE, MH 5'-0" AFF. PROVIDE 3/4" CND FROM ELEV TO RM.
 - 240 VOLT, 200 AMP, 3 POLE DISC. SW FUSED PER ELEVATOR MANUFACTURER RECOMMENDATION.
 - SEE FLOOR PLAN - OFFICE AREA, THIS SHEET FOR LAYOUT.
 - ALL LIGHTING FIXTURES THIS SHEET ARE TYPE A-1/150 UNLESS NOTED OTHERWISE. CENTER FIXTURES BETWEEN POST-TENSIONED BEAMS.
 - ADD ALT NO. 2
STUB OUT 4'-4" CND FOR FUTURE ELEC SERVICE AND EXTEND 2' BEYOND EAST WALL OF BUILDING NEAR INCOMING SERVICE.
STUB OUT 3'-4" CND FOR FUTURE TEL SERVICE AND CABLE TV, EXTEND 5' BEYOND NORTH WALL OF BUILDING WHERE INDICATED AND CAP. COORDINATE WITH UTILITY COMPANY.
 - STUB OUT 2'-4" CND FOR FUTURE ELEC SERVICE AND EXTEND 2' BEYOND EAST WALL OF BUILDING NEAR INCOMING SERVICE.
STUB OUT 2'-4" CND FOR FUTURE TEL SERVICE AND CABLE TV, EXTEND 5' BEYOND NORTH WALL OF BUILDING WHERE INDICATED AND CAP. COORDINATE WITH UTILITY COMPANY.
 - RUN 1-4" PVC CND FOR TELE SERVICE AND STUB-OUT 5' BEYOND NORTH WALL OF BUILDING WHERE INDICATED.
 - LIGHTS SHALL BE CIRCUITED TO CRESTAR BUILDING FOR POWER AND CONTROL. SEE SHEET A16 FOR CONTINUATION.
 - INSTALL JUNCTION BOX FOR PILOT CLOCK AND ROUTE 3-#12 & 1-#12 GND IN 3/4" CND TO TOWER CLOCK.

	8-16-93	REVISED PER CONTRACTOR'S MARKED DOCUMENTS	JLS
REVISION	DATE	DESCRIPTION	BY APP
DESIGNED	JWW	CHURCH AVENUE PARKING FACILITY ROANOKE, VIRGINIA	
DRAWN	FMP		
CHECKED	MHC	ELECTRICAL GROUND FLOOR PLAN	
APPROVED			
SUBMITTED	PCN		
HAYES, SEAY, MATTERN & MATTERN		SCALE	COMM. NO. 4606C
ARCHITECTS - ENGINEERS - PLANNERS		DATE	SHEET E2
ROANOKE, VIRGINIA		APRIL 1991	